


# Technical data sheet

## Fastening clip 1015 D

Item no. 1009465

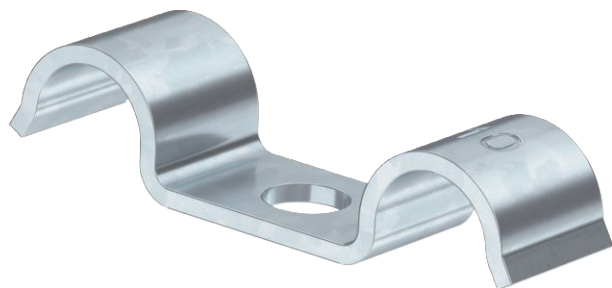

Fastening clip with a central fastening point for 2 cables or 2 pipes




|           |                   |
|-----------|-------------------|
| <b>St</b> | Steel             |
| <b>G</b>  | Electrogalvanised |

### Master data

|                          |                   |
|--------------------------|-------------------|
| Item no.                 | 1009465           |
| Type                     | 1015 D 10 G       |
| Description 1            | Fastening clip    |
| Description 2            | for 2 cables      |
| Dimension                | 10mm              |
| Material                 | Steel             |
| Material symbol          | St                |
| Surface                  | Electrogalvanised |
| Surface to DIN           | DIN EN 12329      |
| Surface symbol           | G                 |
| Smallest sales unit (VG) | 100,00 Piece      |
| Weight                   | 1,30 kg/100 pc.   |

### Technical data

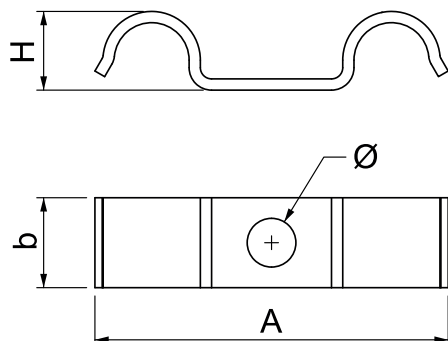

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Length                           | 47,00 mm                            |
| Width                            | 12,00 mm                            |
| Height                           | 10,50 mm                            |
| Dimension A                      | 47,00 mm                            |
| Dimension b                      | 12,00 mm                            |
| Dimension H                      | 10,50 mm                            |
| Distance to the wall             | <input type="checkbox"/>            |
| Number of cables/pipes           | 2,00                                |
| Version                          | Single-lobe                         |
| Fastening type                   | Screw hole                          |
| For diameter                     | 10 mm                               |
| Suitable in fire protection area | <input type="checkbox"/>            |
| Halogen-free                     | <input checked="" type="checkbox"/> |
| Plastic coated                   | <input type="checkbox"/>            |
| Hole size                        | 6,5 mm                              |
| Clamping range D                 | 10,00 mm                            |
| UV-resistant                     | <input checked="" type="checkbox"/> |