

# Technical data sheet

## Spacer clip 733

Item no. 1362764



Spacer clip for the installation of pipes and cables on walls, ceiling and floors. With self-locking upper part. Fastening via slot From the clip size of 20 suitable for the installation with a nail device or bolt-firing device.

Approved for the maintenance of electrical function to DIN 4102 Part 12, function maintenance classes E30 to E90 (except ALU)



|    |                   |
|----|-------------------|
| St | Steel             |
| G  | Electrogalvanised |

### Master data

|                          |                   |
|--------------------------|-------------------|
| Item no.                 | 1362764           |
| Type                     | ASL 733 20 G      |
| Description 1            | Distance saddle   |
| Description 2            | with slot         |
| Dimension                | 17-20mm           |
| Material                 | Steel             |
| Material symbol          | St                |
| Surface                  | Electrogalvanised |
| Surface to DIN           | DIN EN 12329      |
| Surface symbol           | G                 |
| Smallest sales unit (VG) | 25,00 Piece       |
| Weight                   | 2,20 kg/100 pc.   |


# Technical data sheet

## Spacer clip 733

Item no. 1362764



### Technical data

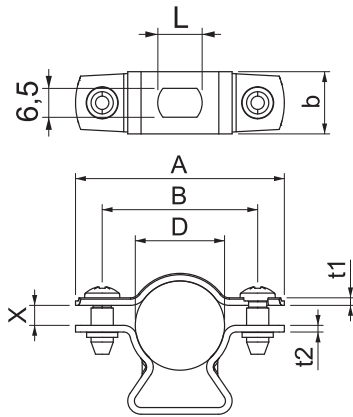

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Dimension A                      | 47,00 mm                            |
| Dimension B                      | 35,00 mm                            |
| Dimension b                      | 14,00 mm                            |
| Dimension D                      | 17,00 - 20,00 mm                    |
| Dimension D                      | 20,00 mm                            |
| Dimension L                      | 10,00 mm                            |
| Dimension t1                     | 1,00 mm                             |
| Dimension t2                     | 1,50 mm                             |
| Dimension x                      | 4,50 mm                             |
| Distance to the wall             | <input checked="" type="checkbox"/> |
| Number of cables/pipes           | 1,00                                |
| Version                          | Closed                              |
| Fastening type                   | Screw hole                          |
| Suitable in fire protection area | <input checked="" type="checkbox"/> |
| Halogen-free                     | <input checked="" type="checkbox"/> |
| Plastic coated                   | <input type="checkbox"/>            |
| Clamping range D                 | 17,00 - 20,00 mm                    |
| UV-resistant                     | <input checked="" type="checkbox"/> |