

Technical data sheet

MS4022 mounting rail, heavy-duty, slot 18 mm, perforated
Item no. 1121979



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1121979
Type	MS4022P2000FT
Description 1	Profile rail
Description 2	perforated, slot 18mm
Dimension	2000x40x22,5
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	2,00 m
Weight	152,50 kg/100 m

Technical data

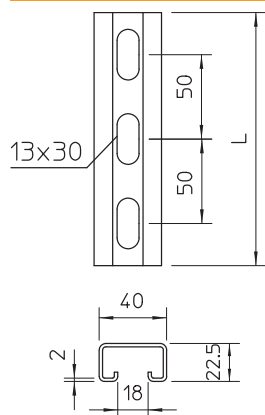

Length	2.000,00 mm
Width	40,00 mm
Height	22,50 mm
Dimension L	2.000,00 mm
Breakable	☐
Dimension WxH	40 x 22,5 mm
Version	Single profile
Type of perforation	Perforated back
Drill hole spacing, centre	50,00 mm
Suitable for maintaining electrical function	☒
Material thickness	2,00 mm
With perforation	☐
With toothing	☐
Profile shape	C profile

Technical data sheet

MS4022 mounting rail, heavy-duty, slot 18 mm,
perforated
Item no. 1121979



Technical data

Slot width	18,00 mm
Static value A	1,74 cm ²
Static value I _y	1,18 cm
Static value I _z	4,45 cm
Static value W _y	1,05 cm ³
Static value W _z	2,23 cm ³