


Technical data sheet

MS4141 mounting rail, slot 22 mm, side perforation

Item no. 1123003

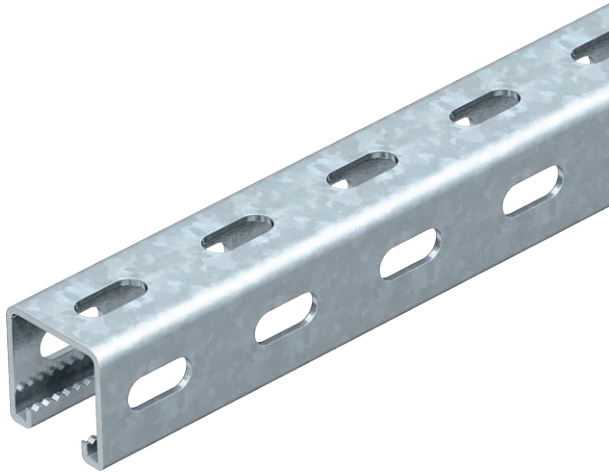

Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1123003
Type	MSL4141PP3000FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Dimension	3000x41x41
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3,00 m
Weight	191,50 kg/100 m


Technical data sheet

MS4141 mounting rail, slot 22 mm, side perforation

Item no. 1123003



Technical data

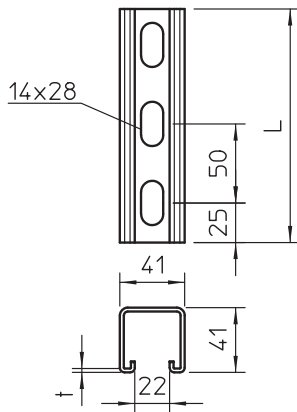

Length	3.000,00 mm
Width	41,00 mm
Height	41,00 mm
Dimension L	3.000,00 mm
Breakable	☐
lampDimension WxH	41x41 mm
Version	Single profile
Type of perforation	3 sides perforated
Drill hole spacing, centre	50,00 mm
Suitable for maintaining electrical function	☐
Hole size	14x28 mm
Material thickness	2,00 mm
With perforation	☒
With tothing	☒
Profile shape	C profile
Slot width	22,00 mm
Static value A	2,01 cm ²
Static value Iy	5,13 cm
Static value Iz	5,88 cm
Static value Wy	2,49 cm ³
Static value Wz	2,88 cm ³