

Technical data sheet

Cable tray BKRS 110

Item no. 6061983



Heavy-duty, walkable cable tray system BKRS with base perforation, in 110 mm side height.



St	Steel
FS	Strip galvanised

Additional product text, instruction	The cable tray has connector perforations on both sides. Straight connectors should be ordered separately and in the appropriate quantity.
Additional product text 1	Magnetic shield insulation without cover 20 dB, with cover 50 dB.

Master data

Item no.	6061983
Type	BKRS 1120 FS
Description 1	Cable tray BKRS
Description 2	walkable
Manufacturer	OBO
Dimension	110x200x3000
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	3,00 m
Weight	659,60 kg/100 m

Technical data

Usable cross-section	19.600,00 mm ²
Usable cross-section	196,00 cm ²
Suitable for maintaining electrical function	☐
Connector version	Without connectors

Technical data sheet

Cable tray BKRS 110


Item no. 6061983



Technical data

With cover	☐
Mounting perforation in base	☒
NATO hole pattern	☐
Rustproof steel, pickled	☐
Side perforation	☐
Wide-span version	☐

Dimensions

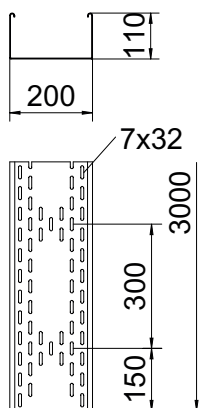

Length	3.000,00 mm
Width	200,00 mm
Height	110,00 mm
Side height	110,00 mm
Dimension B	200,00 mm
Dimension H	110,00 mm
Dimension L	3.000,00 mm
Plate thickness	2,00 mm

Appr. load:

Support spacing 1.5 m	5,07 kN/m
Support spacing 2.0 m	4,75 kN/m
Support spacing 2.5 m	2,73 kN/m
Support spacing 3.0 m	2,00 kN/m

Appr. load: