


Technical data sheet

UDHOME2 floor socket, without floor covering recess,
double NF,
Item no. 7368332

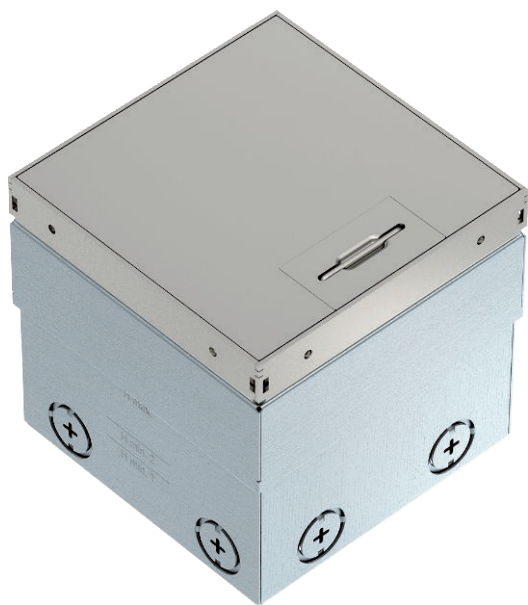

Square floor socket for use in dry-care cavity and screed floors for indoor use. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height-adjustment range is + 35 mm.

Frame and cover made of stainless steel and visible in the floor covering.



A2 Stainless steel, rustproof

Additional product text, instruction The scope of delivery contains a double NF socket.
Up to two modular data sockets can be installed in the optional mounting support.


Master data	
Item no.	7368332
Type	UDHOME2 GVN
Description 1	Floor socket
Description 2	with double NF socket
Dimension	140x140x110
Material	Stainless steel, material A2
Material symbol	A2
Smallest sales unit (VG)	1,00 Piece
Weight	220,00 kg/100 pc.

Technical data sheet

UDHOME2 floor socket, without floor covering recess,
double NF,
Item no. 7368332



Technical data

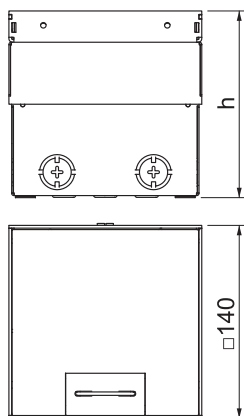

Length	140,00 mm
Width	140,00 mm
Height	100,00 mm
Dimension h	100,00 mm
Number of installable devices	2,00
Floor covering protection frame	☐
Floor care	Dry
Version for	Square
Application when used	6.101.1 Dry floor care
Application when unused	6.101.1 Dry floor care
Floor height	100-135 mm
Device support to accept mounting boxes	☐
Suitable for wet care	☐
Suitable for screed-flush closed underfloor ducts	☐
Suitable for screed-covered underfloor ducts	☐
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
With floor covering recess	☐
Nominal size for device installation units	2
Standard	EN 50085-2-2
Opening mechanism	Handle
Frame version	Floor covering contact edge
Schwerlastausführung	☐
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP40
Protection rating IK code	IK10
Approvals	VDE
Vertical load, small area	6.102.7 (to 3,000 N)