


# Technical data sheet

## Anchor rail AMS3518, slot 16.5 mm, perforated

Item no. 1112708

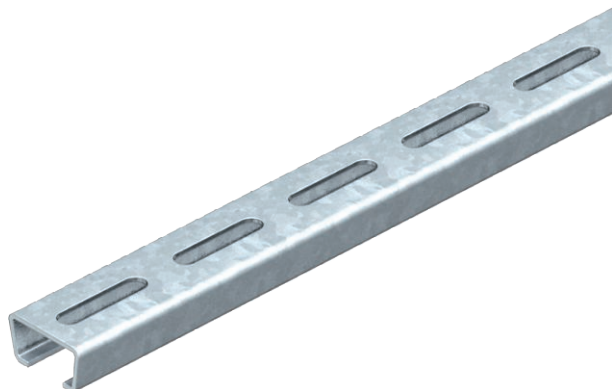

Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.




|    |                  |
|----|------------------|
| St | Steel            |
| FS | Strip galvanised |

### Master data

|                          |                         |
|--------------------------|-------------------------|
| Item no.                 | 1112708                 |
| Type                     | AMS3518P2000FS          |
| Description 1            | Profile rail            |
| Description 2            | perforated, slot 16.5mm |
| Dimension                | 2000x35x18              |
| Material                 | Steel                   |
| Material symbol          | St                      |
| Surface                  | Strip galvanised        |
| Surface to DIN           | DIN EN 10346            |
| Surface symbol           | FS                      |
| Smallest sales unit (VG) | 2,00 m                  |
| Weight                   | 115,00 kg/100 m         |

### Technical data

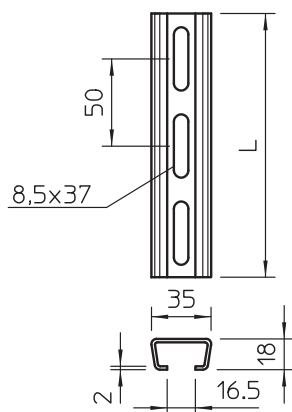

|                                              |                                     |
|----------------------------------------------|-------------------------------------|
| Length                                       | 2.000,00 mm                         |
| Width                                        | 35,00 mm                            |
| Height                                       | 18,00 mm                            |
| Dimension L                                  | 2.000,00 mm                         |
| Breakable                                    | <input type="checkbox"/>            |
| Dimension WxH                                | 35 x 18 mm                          |
| Version                                      | Single profile                      |
| Type of perforation                          | Perforated back                     |
| Drill hole spacing, centre                   | 50,00 mm                            |
| Bundle                                       | 20,00 m                             |
| Suitable for maintaining electrical function | <input type="checkbox"/>            |
| Material thickness                           | 2,00 mm                             |
| With perforation                             | <input checked="" type="checkbox"/> |
| With tothing                                 | <input type="checkbox"/>            |
| Profile shape                                | C profile                           |

# Technical data sheet

Anchor rail AMS3518, slot 16.5 mm, perforated

Item no. 1112708



## Technical data

|                             |                      |
|-----------------------------|----------------------|
| Slot width                  | 16,50 mm             |
| Static value A              | 1,31 cm <sup>2</sup> |
| Static value I <sub>y</sub> | 0,54 cm              |
| Static value I <sub>z</sub> | 2,31 cm              |
| Static value W <sub>y</sub> | 0,52 cm <sup>3</sup> |
| Static value W <sub>z</sub> | 1,32 cm <sup>3</sup> |