

Technical data sheet

33° socket, with earthing pin, single

Item no. 6120228



Socket with earthing pin Single 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250V ~, with connection terminals to IEC 60884-1.



PC

 Polycarbonate

Additional product text 2

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.

Master data

|                          |                    |
|--------------------------|--------------------|
| Item no.                 | 6120228            |
| Type                     | STD-F3 SR01        |
| Description 1            | Socket 33°, single |
| Description 2            | with earth pin     |
| Dimension                | 250V, 10/16A       |
| Colour                   | Signal red         |
| RAL number               | 3001               |
| Material                 | Polycarbonate      |
| Material symbol          | PC                 |
| Smallest sales unit (VG) | 1,00 Piece         |
| Weight                   | 3,80 kg/100 pc.    |


# Technical data sheet

## 33° socket, with earthing pin, single

Item no. 6120228



### Technical data

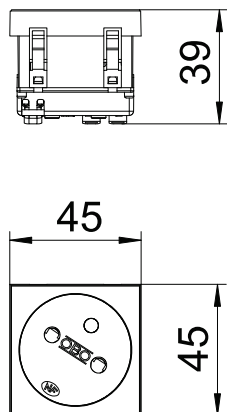

|                                                  |                                     |
|--------------------------------------------------|-------------------------------------|
| Width                                            | 45,00 mm                            |
| Height                                           | 45,00 mm                            |
| Depth                                            | 39,00 mm                            |
| Cover                                            | Central plate                       |
| Closable                                         | <input type="checkbox"/>            |
| Connection type                                  | Screwless terminal                  |
| Printed label/coding                             | Without printing                    |
| Version                                          | Single 33°                          |
| Version                                          | Socket 33°, single, with earth pin  |
| Surface version                                  | Matt                                |
| Sockets/switch version                           | Protective contact pin              |
| Version for                                      | Protective contact pin              |
| Number of poles                                  | 2,00                                |
| Number of units                                  | 1,00                                |
| Number of modules (for modular construction)     | 1,00                                |
| Number of switchable sockets                     | 0,00                                |
| Ejection mechanism                               | <input type="checkbox"/>            |
| Fastening type                                   | Lock                                |
| Labelling panel                                  | <input type="checkbox"/>            |
| Operating temperature                            | -5,00 - 40,00 °C                    |
| Error current protection                         | <input type="checkbox"/>            |
| For more difficult conditions (according to VDE) | <input type="checkbox"/>            |
| Halogen-free                                     | <input checked="" type="checkbox"/> |
| Insulated installation                           | <input type="checkbox"/>            |
| Increased touch protection                       | <input checked="" type="checkbox"/> |
| Hinged cover                                     | <input type="checkbox"/>            |
| Coding                                           | No                                  |
| Warning light                                    | <input type="checkbox"/>            |
| With on/off switch                               | <input type="checkbox"/>            |
| With fine-wire fuse                              | <input type="checkbox"/>            |
| With functional lighting                         | <input type="checkbox"/>            |
| With orientation lighting                        | <input type="checkbox"/>            |
| Mounting type                                    | Device installation duct            |
| Nominal voltage                                  | 250,00 V                            |
| Nominal current                                  | 16,00 A                             |
| Protection rating                                | Other                               |
| Special power supply                             | Without special power supply        |
| Socket version                                   | NF                                  |
| Socket angle                                     | 33°                                 |
| Transparent                                      | <input type="checkbox"/>            |
| Surge protection                                 | <input type="checkbox"/>            |
| Rotated central insert                           | <input checked="" type="checkbox"/> |