

# Technical data sheet

## Electrogalvanised steel bend, without thread

Item no. 2046809



90° bend with moulded sleeves, for electrical installation pipes according to EN 61386-1. With burr-free inner wall.



|    |                   |
|----|-------------------|
| St | Steel             |
| G  | Electrogalvanised |

### Master data

|                          |                      |
|--------------------------|----------------------|
| Item no.                 | 2046809              |
| Type                     | SBN20 G              |
| Description 1            | Conduit plug-in bend |
| Description 2            | without thread       |
| Dimension                | ø20mm                |
| Material                 | Steel                |
| Material symbol          | St                   |
| Surface                  | Electrogalvanised    |
| Surface to DIN           | DIN EN 12329         |
| Surface symbol           | G                    |
| Smallest sales unit (VG) | 25,00 Piece          |
| Weight                   | 13,30 kg/100 pc.     |


# Technical data sheet

## Electrogalvanised steel bend, without thread

Item no. 2046809



### Technical data

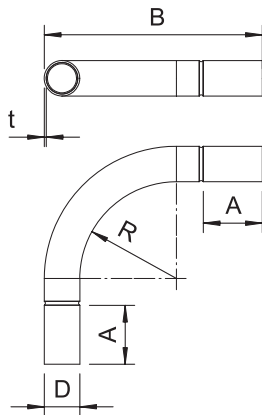

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Dimension A                     | 53,70 mm                            |
| Dimension B                     | 155,00 mm                           |
| Dimension D                     | 22,60 mm                            |
| Dimension M                     | M20                                 |
| Dimension R                     | 90,00 mm                            |
| Dimension d                     | 20,60 mm                            |
| Dimension t                     | 1,00 mm                             |
| Dimension l                     | 30,00 mm                            |
| Version                         | Connector                           |
| Size                            | 20                                  |
| For nominal pipe diameter       | 20,00 mm                            |
| Flexible                        | <input type="checkbox"/>            |
| Halogen-free                    | <input type="checkbox"/>            |
| With inspection opening and lid | <input type="checkbox"/>            |
| With sleeve                     | <input checked="" type="checkbox"/> |
| Polished surface                | <input type="checkbox"/>            |
| Brushed surface                 | <input type="checkbox"/>            |
| Angle of the bend               | 90,00 °                             |
| Two-part                        | <input type="checkbox"/>            |