


Technical data sheet

UGD250-3 underfloor socket for GES9R/55

Item no. 7410060

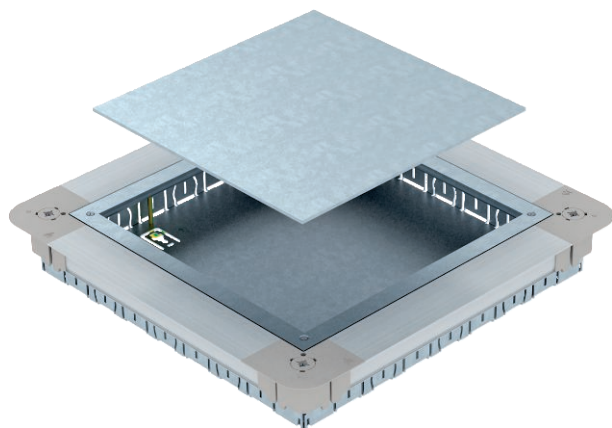

Underfloor accessory socket with mounting lid and lid blanking plate with sheet steel side walls. For the installation of a square GES9 55 service outlet in screed heights of 55 mm or more. Height can be infinitely adjusted to the nominal screed height and the screed can be worked flushed to the screed scraping edge. With 7 x M20, 3 x M25, 4 x M32 pipe insertion openings on each side. Usable pipe size at a system height of 55 mm: M20.




St Steel
FS Strip galvanised

Master data

Item no.	7410060
Type	UGD55 250-3 9R
Description 1	Underfloor box empty
Description 2	for GES9/55UV
Dimension	367x367x55
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	1,00 Piece
Weight	430,00 kg/100 pc.

Technical data

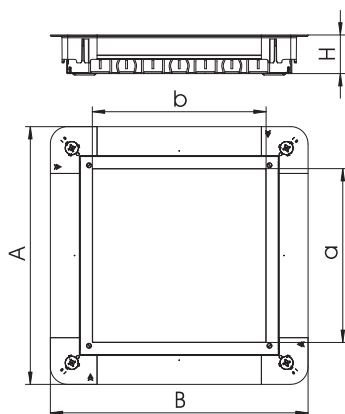

Dimension A	367,00 mm
Dimension B	367,00 mm
Dimension a	244,00 mm
Dimension b	244,00 mm
Dimension h	55,00 mm
Expansion option	For installation of accessories
Floor care	Dry
Lowerable to be flushfloor	☒
Floor plate	☒
Cover version	Square
Seal installation option	☐
Installation opening for on-floor tank	☐
Installation opening for flush-mount unit	Square

Technical data sheet

UGD250-3 underfloor socket for GES9R/55

Item no. 7410060



Technical data

Decouplable	☐
Screed height	55-80 mm
For pipe connection	☒
Suitable for screed-flush closed underfloor ducts	☐
Suitable for screed-covered underfloor ducts	☐
Suitable for underfloor ducts	☐
Nominal size	250,00 mm
Nominal size for device installation units	9