

Technical data sheet

US 3 support

Item no. 6342338



U support in fixed lengths. Dimensions 30 x 50 mm.



St	Steel
FS	Strip galvanised

Additional product text, instruction	For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.
--------------------------------------	--

Master data

Item no.	6342338
Type	US 3 200 FS
Description 1	U support
Description 2	3-sided perforated
Dimension	50x30x2000
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	1,00 Piece
Weight	266,00 kg/100 pc.


Technical data sheet

US 3 support

Item no. 6342338



Technical data

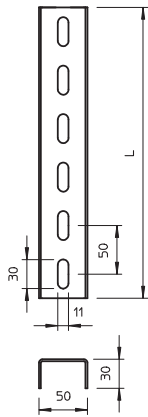

Length	2.000,00 mm
Width	30,00 mm
Height	50,00 mm
Dimension L	2.000,00 mm
Dimension	30 x 50 x 2,0 mm
Breakable	☐
Version	Single profile
Type of perforation	3 sides perforated
Suitable for maintaining electrical function	☒
Hole width	11,00 mm
Material thickness	2,00 mm
With tothing	☐
Profile shape	U profile
Slot width	30,00 mm
Static value A	1,42 cm ²
Static value Iy	1,52 cm
Static value Iz	5,72 cm
Static value Wy	0,70 cm ³
Static value Wz	2,29 cm ³