

Technical data sheet

CML3518 profile rail, slot 17 mm, perforated

Item no. 1104500



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.



St	Steel
FS	Strip galvanised

Master data

Item no.	1104500
Type	CML3518P2000FS
Description 1	Profile rail
Description 2	perforated, slot 17mm
Dimension	2000x35x18
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	2,00 m
Weight	71,00 kg/100 m


Technical data sheet

CML3518 profile rail, slot 17 mm, perforated

Item no. 1104500



Technical data

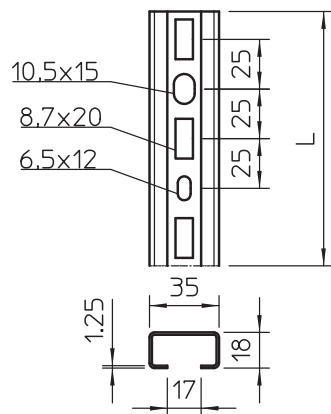

Length	2.000,00 mm
Width	35,00 mm
Height	18,00 mm
Dimension L	2.000,00 mm
Breakable	☐
lampDimension WxH	35 x 18 mm
Version	Single profile
Type of perforation	Perforated back
Drill hole spacing, centre	25,00 mm
Bundle	20,00 m
Suitable for maintaining electrical function	☒
Material thickness	1,25 mm
With perforation	☒
With tothing	☐
Profile shape	C profile
Slot width	17,00 mm
Static value A	0,88 cm ²
Static value Iy	0,41 cm
Static value Iz	1,81 cm
Static value Wy	0,41 cm ³
Static value Wz	1,03 cm ³