

Technical data sheet

Wiring trunking, type LK4/N 60060

Item no. 6178207



Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.



PVC

 Polyvinylchloride

Additional product text 2

 Flushfloor design with predetermined break points

| Master data              |                               |
|--------------------------|-------------------------------|
| Item no.                 | 6178207                       |
| Type                     | LK4 N 60060                   |
| Description 1            | Slotted cable trunking system |
| Dimension                | 60x60x2000                    |
| Colour                   | Stone grey                    |
| RAL number               | 7030                          |
| Material                 | Polyvinylchloride             |
| Material symbol          | PVC                           |
| Smallest sales unit (VG) | 2,00 m                        |
| Weight                   | 68,00 kg/100 m                |


# Technical data sheet

Wiring trunking, type LK4/N 60060

Item no. 6178207



## Technical data

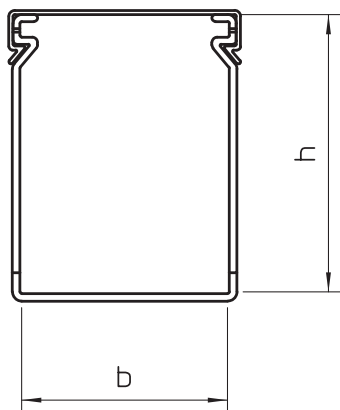

|                            |                                     |
|----------------------------|-------------------------------------|
| Length                     | 2.000,00 mm                         |
| Width                      | 60,00 mm                            |
| Height                     | 60,00 mm                            |
| Duct depth                 | 60,00 mm                            |
| lampDimension WxH          | 60x60 mm                            |
| Side wall version          | Slotted                             |
| Fastening type             | Base perforation                    |
| Flexible                   | <input type="checkbox"/>            |
| Creepage current-resistant | <input checked="" type="checkbox"/> |
| With cover                 | <input checked="" type="checkbox"/> |
| Slot spacing               | 12,50 mm                            |
| Slot width                 | 5,00 mm                             |