


Technical data sheet

Cable tray SKS 60

Item no. 6056202

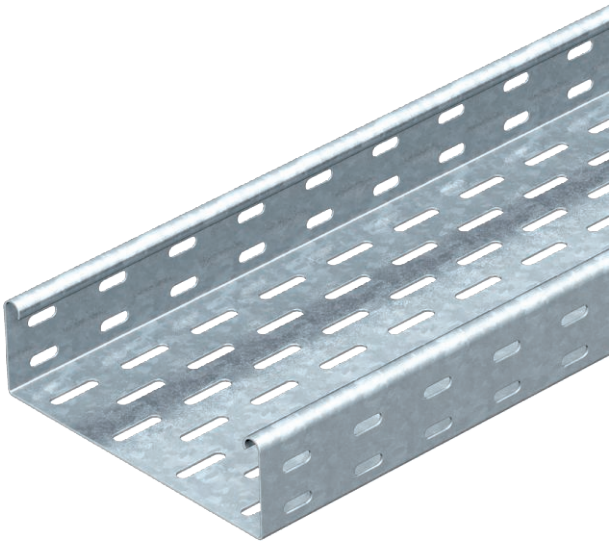

SKS 60 = heavy-duty cable tray system with 60 mm side height.



St	Steel
FS	Strip galvanised

Additional product text, instruction	The cable tray, type SKS, should also be used for the maintenance of electrical function. For additional data, please refer to BSS fire protection systems.
Additional product text 1	Magnetic shield insulation without cover 20 dB, with cover 50 dB.

Master data

Item no.	6056202
Type	SKS 620 FS
Description 1	Cable tray SKS
Description 2	perforated, with connector set
Manufacturer	OBO
Dimension	60x200x3000
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	3,00 m
Weight	364,00 kg/100 m

Technical data sheet

Cable tray SKS 60

Item no. 6056202




Technical data



Usable cross-section	11.800,00 mm ²
Usable cross-section	118,00 cm ²
Suitable for maintaining electrical function	☒
Connector version	Supplied connectors
With cover	☐
Mounting perforation in base	☒
NATO hole pattern	☐
Rustproof steel, pickled	☐
Side perforation	☒
Wide-span version	☐

Dimensions

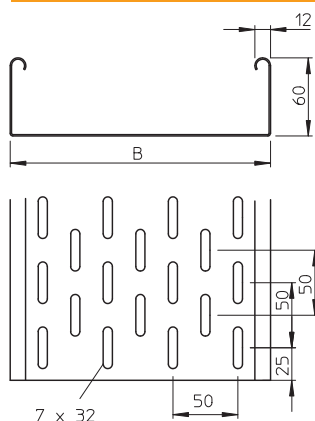


Length	3.000,00 mm
Width	200,00 mm
Height	60,00 mm
Side height	60,00 mm
Dimension B	200,00 mm
Plate thickness	1,50 mm

Appr. load:

Support spacing 1.5 m	2,65 kN/m
Support spacing 2.0 m	1,80 kN/m
Support spacing 2.5 m	1,15 kN/m
Support spacing 3.0 m	0,50 kN/m

Appr. load:

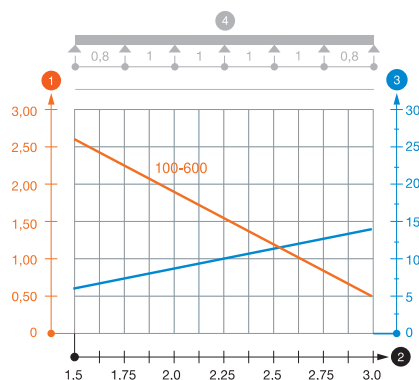

Load diagram, cable tray, type SKS 60

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width