

Sirios

CE IP42 / IP65 



- Easy mounting
- Complete range of accessories
- Certified family of emergency lights in accordance to EN 60 598-2-22
- ENEC certificate
- IP rating IP42 with the ability to upgrade it to IP65
- EasiCheck2 & CGS version available

Light Source:

- Lamp. 8W fluorescent G5, 2G7 11W, 18W and 24W/2G11

Materials:

- Base and reflector unit in white ABS
- Clear polycarbonate diffuser

Operation:

- Maintained, Non-Maintained and Sustain versions
- Autonomy from 1h up to 3h
- Functional test integrated into the diffuser
- Inhibition and Rest Mode
- Autotest and Easichek 2 models available
- Ultra Models with lumens flow up to 350lm
- Low consumption in Maintained operation, with a power save of 33% of the nominal output of the lamp

Installation:

- Wall and Ceiling - Installation kit for recessed wall and ceiling
- Base for quick mounting (accessory)
- Panel, double-sided printed for reporting security (optional)
- Distance view of 30 meters provides the ability to use fewer products and less power consumption per coverage area of an application
- Protection Kit IP65 for outdoor use

Applications:


- Schools, universities, public administration, commercial environments
- Areas with large heights

Sirios



The Sirios range of emergency lights are low profile, designed and equipped with technical solutions and accessories for a wide range of applications such as offices, restaurants, hotels, hospitals and general commercial applications.

The range of accessories includes a recessed base for installation to walls and false ceilings, an IP65 weatherproof kit as well as a variety of lamp options (8, 2x8, 11, 18, 24W).



Test Point

Just by pressing the plastic diffuser on all Sirios models you can test the lamp operation, the battery and electronic circuit switching



Recessed Base

Recessed base for false ceiling and wall recessed applications




IP65 kit

Retrofit IP65 weather proof kit provides an upgrade from IP42 to IP65 installations



Sirios Exit sign plexiglass

30m viewing distance reduces the quantity of fittings required and in turn reduces power consumption

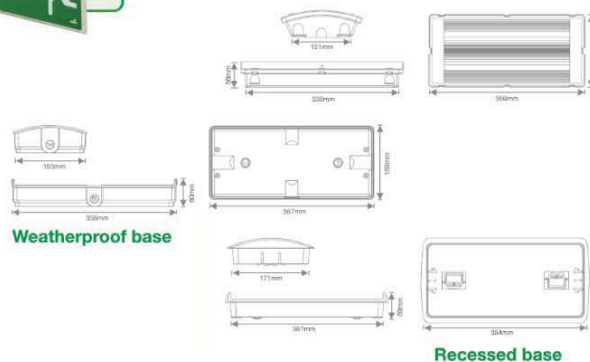

Weatherproof base

Recessed base

Range: Multi

Order code	Description					
O-S8	Sirios Non maintained 8W 1h30	FL8WG5	85 Lm	90'	2,4V-1,7Ah NiCd	Non maintained
O-S8-3H	Sirios Non maintained 8W 3h	FL8WG5	85 Lm	180'	2,4V-1,7Ah NiCd	Non maintained
O-S11	Sirios Non maintained 11W 1h30	FL11W2G7	180 Lm	90'	4,8V-1,7Ah NiCd	Non maintained
O-S11-3H	Sirios Non maintained 11W 3h	FL11W2G7	180 Lm	180'	3,6V-4Ah NiCd	Non maintained
O-S18	Sirios Non maintained 18W 1h30	FL18W2G11	268 Lm	90'	6V-1,7Ah NiCd	Non maintained
O-S18-3H	Sirios Non maintained 18W 3h	FL18W2G11	268 Lm	180'	4,8V-4Ah NiCd	Non maintained
O-S24	Sirios Non maintained 24W 1h30	FL24W2G11	330 Lm	90'	4,8V-2,2Ah NiCd	Non maintained
O-S24-3H	Sirios Non maintained 24W 3h	FL24W2G11	330 Lm	180'	6V-4Ah NiCd	Non maintained
O-S8M	Sirios Maintained 8W 1h30	FL8WG5	85 Lm	90'	2,4V-1,7Ah NiCd	Maintained
O-S8M-3H	Sirios Maintained 8W 3h	FL8WG5	85 Lm	180'	2,4V-4Ah NiCd	Maintained
O-S11M	Sirios Maintained 11W 1h30	FL11W2G7	180 Lm	90'	4,8V-1,7Ah NiCd	Maintained
O-S11M-3H	Sirios Maintained 11W 3h	FL11W2G7	180 Lm	180'	3,6V-4Ah NiCd	Maintained
O-S18M	Sirios Maintained 18W 1h30	FL18W2G11	268 Lm	90'	6V-1,7Ah NiCd	Maintained
O-S18M-3H	Sirios Maintained 18W 3h	FL18W2G11	268 Lm	180'	4,8V-4Ah NiCd	Maintained
O-S24M	Sirios Maintained 24W 1h30	FL24W2G11	330 Lm	90'	4,8V-2,2Ah NiCd	Maintained
O-S24M-3H	Sirios Maintained 24W 3h	FL24W2G11	330 Lm	180'	6V-4Ah NiCd	Maintained
O-S8S	Sirios Sustain 8W 1h30	2 x FL8WG5	85 Lm	90'	2,4V-1,7Ah NiCd	Sustain
O-S8S-3H	Sirios Sustain 8W 3h	2 x FL8WG5	85 Lm	180'	6V-1,7Ah NiCd	Sustain
O-S8MAINS	Sirios Mains 8W	FL8WG5	-	-	-	Mains
O-S11MAINS	Sirios Mains 11W	FL11W2G7	-	-	-	Mains
O-S18MAINS	Sirios Mains 18W	FL18W2G11	-	-	-	Mains
O-S24MAINS	Sirios Mains 24W	FL24W2G11	-	-	-	Mains

Range: Ultra

Order code	Description					
O-S8U	Sirios Non maintained 8W 1h	FL8WG5	230 Lm	60'	6V-1,7Ah NiCd	Non maintained
O-S8U-PLUS	Sirios Non maintained 8W 1h	FL8WG5	320 Lm	60'	3,6V-4Ah NiCd	Non maintained
O-S8U-3H	Sirios Non maintained 8W 3h	FL8WG5	210 Lm	180'	6V-4Ah NiCd	Non maintained
O-S11U	Sirios Non maintained 11W 1h	FL11W2G7	350 Lm	60'	3,6V-4Ah NiCd	Non maintained
O-S8MU	Sirios Maintained 8W 1h	FL8WG5	230 Lm	60'	6V-1,7Ah NiCd	Maintained
O-S8MU-PLUS	Sirios Maintained 8W 1h	FL8WG5	320 Lm	60'	6V-1,7Ah NiCd	Maintained
O-S8MU-3H	Sirios Maintained 8W 3h	FL8WG5	210 Lm	180'	3,6V-4Ah NiCd	Maintained
O-S11MU	Sirios Maintained 11W 1h	FL11W2G7	350 Lm	60'	6V-4Ah NiCd	Maintained

Range: Autotest


Order code	Description					
O-S8-AT	Non maintained Sirios 8W Autotest 1h	FL8WG5	200 Lm	60'	6V-1,7Ah NiCd	Non maintained
O-S8-AT-3H	Non maintained Sirios 8W Autotest 3h	FL8WG5	100 Lm	180'	3,6V-4Ah NiCd	Non maintained
O-S11-AT	Non maintained Sirios 11W Autotest 1h	FL11W2G7	220 Lm	60'	6V-1,7Ah NiCd	Non maintained
O-S11-AT-3H	Non maintained Sirios 11W Autotest 3h	FL11W2G7	110 Lm	180'	3,6V-4Ah NiCd	Non maintained
O-S18-AT	Non maintained Sirios 18W Autotest 1h	FL18W2G11	230 Lm	60'	6V-1,7Ah NiCd	Non maintained
O-S18-AT-3H	Non maintained Sirios 18W Autotest 3h	FL18W2G11	120 Lm	180'	3,6V-4Ah NiCd	Non maintained
O-S24-AT	Non maintained Sirios 24W Autotest 1h	FL24W2G11	330 Lm	60'	6V-1,7Ah NiCd	Non maintained
O-S24-AT-3H	Non maintained Sirios 24W Autotest 3h	FL24W2G11	330 Lm	180'	6V-4Ah NiCd	Non maintained
O-S8M-AT	Maintained Sirios 8W Autotest 1h	FL8WG5	200 Lm	60'	6V-1,7Ah NiCd	Maintained
O-S8M-AT-3H	Maintained Sirios 8W Autotest 3h	FL8WG5	100 Lm	180'	3,6V-4Ah NiCd	Maintained
O-S11M-AT	Maintained Sirios 11W Autotest 1h	FL11W2G7	220 Lm	60'	6V-1,7Ah NiCd	Maintained
O-S11M-AT-3H	Maintained Sirios 11W Autotest 3h	FL11W2G7	110 Lm	180'	3,6V-4Ah NiCd	Maintained
O-S18M-AT	Maintained Sirios 18W Autotest 1h	FL18W2G11	230 Lm	60'	6V-1,7Ah NiCd	Maintained
O-S18M-AT-3H	Maintained Sirios 18W Autotest 3h	FL18W2G11	120 Lm	180'	3,6V-4Ah NiCd	Maintained
O-S24M-AT	Maintained Sirios 24W Autotest 1h	FL24W2G11	330 Lm	60'	6V-1,7Ah NiCd	Maintained
O-S24M-AT-3H	Maintained Sirios 24W Autotest 3h	FL24W2G11	330 Lm	180'	6V-4Ah NiCd	Maintained

Range: CGS models


Order code	Description		Nominal output	Input Voltage
O-S8-CGS	Sirios 8W CGS	FL8WG5	400 Lm	230 VAC, 176 - 275 VDC, 50/60 Hz
O-S11-CGS	Sirios 11W CGS	FL11W2G7	800 Lm	230 VAC, 176 - 275 VDC, 50/60 Hz
O-S18-CGS	Sirios 18W CGS	FL18W2G11	1.100 Lm	230 VAC, 176 - 275 VDC, 50/60 Hz
O-S24-CGS	Sirios 24W CGS	FL24W2G11	1.800 Lm	230 VAC, 176 - 275 VDC, 50/60 Hz

Accessories

Order code	Description
O-S-WB	Wall mounting base
O-S-RB	Recessed base
O-S-IPKIT	Weatherproof base
O-MP41	Vertical metal base
O-PU41	Horizontal metal base
O-S-LGD100	Exit sign Left
O-S-LGD200	Exit sign Right
O-S-LGD300	Exit sign Down





Sirios wall mount base for fast installation

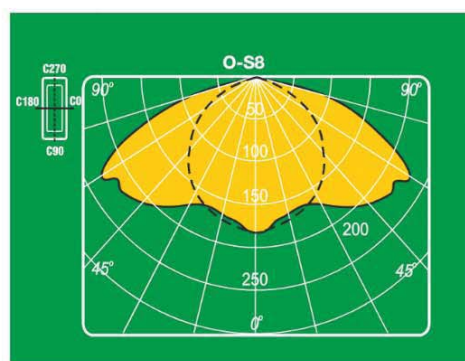

Model	Height (m)	Distance for 1 Lux				Distance for 0.5 Lux			
O-S8	02,60	03,02	08,86	02,21	06,20	04,93	11,15	03,60	07,71
	02,80	02,94	08,76	02,19	06,26	04,88	11,48	03,63	08,00
	03,00	02,83	08,67	02,13	06,34	04,83	11,78	03,67	08,26
	03,20	02,67	08,68	02,06	06,40	04,84	12,04	03,70	08,43
	03,50	02,33	08,68	01,92	06,32	04,84	12,37	03,66	08,64
	04,00	01,49	08,26	01,50	06,16	04,63	12,23	03,58	08,88

Model	Height (m)	Distance for 1 Lux				Distance for 0.5 Lux			
O-S24	02,60	04,65	11,68	03,59	08,83	06,34	13,41	04,91	10,66
	02,80	04,77	11,90	03,72	09,14	06,45	13,86	05,07	10,99
	03,00	04,88	12,25	03,80	09,42	06,62	14,49	05,21	11,28
	03,20	04,97	12,56	03,85	09,67	06,78	15,08	05,33	11,64
	03,50	05,09	12,89	03,94	10,00	06,95	15,72	05,50	12,12
	04,00	05,23	13,53	04,01	10,58	07,26	16,85	05,79	12,90

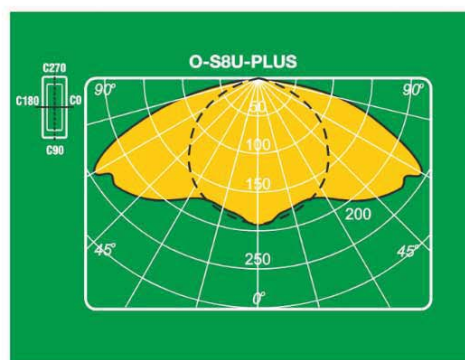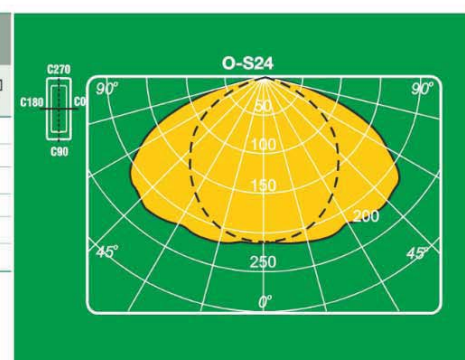

Model	Height (m)	Distance for 1 Lux				Distance for 0.5 Lux			
O-S8U-PLUS	02,60	05,58	13,55	03,91	09,46	07,27	15,82	05,23	11,31
	02,80	05,74	13,86	04,00	09,82	07,43	16,26	05,41	11,79
	03,00	05,89	14,49	04,13	10,15	07,74	16,94	05,57	12,30
	03,20	06,04	15,00	04,25	10,44	08,00	17,58	05,72	12,56
	03,50	06,26	15,50	04,32	10,78	08,25	18,33	05,89	13,17
	04,00	06,30	16,40	04,49	11,43	08,70	19,80	06,21	13,86