




BIS Nakrętki przedłużane

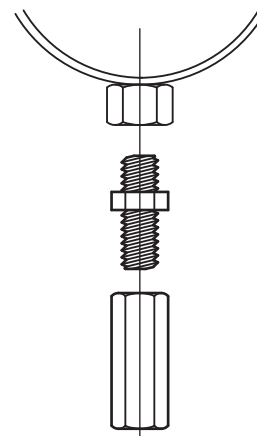

Zalety i właściwości

- do łączenia prętów i trzpieni gwintowanych oraz innych elementów z gwintem zewnętrznym
- materiał: stal
- ocynkowane elektrolitycznie

Nr kat.	G	L	SW1 (mm)	Pud.	Kart.
645 3 625	M6	25 mm	10	100	2.500
645 3 830	M8	30 mm	11	100	2.000
645 3 930	M10	30 mm	13	50	1.000
645 3 940	M10	40 mm	17	50	-
645 3 240	M12	40 mm	19	50	500
645 3 016	M16	60 mm	24	1	-
645 3 020	M20	60 mm	30	1	-
645 3 024	M24	70 mm	36	1	-

