


PREIS® Rapid Coupling

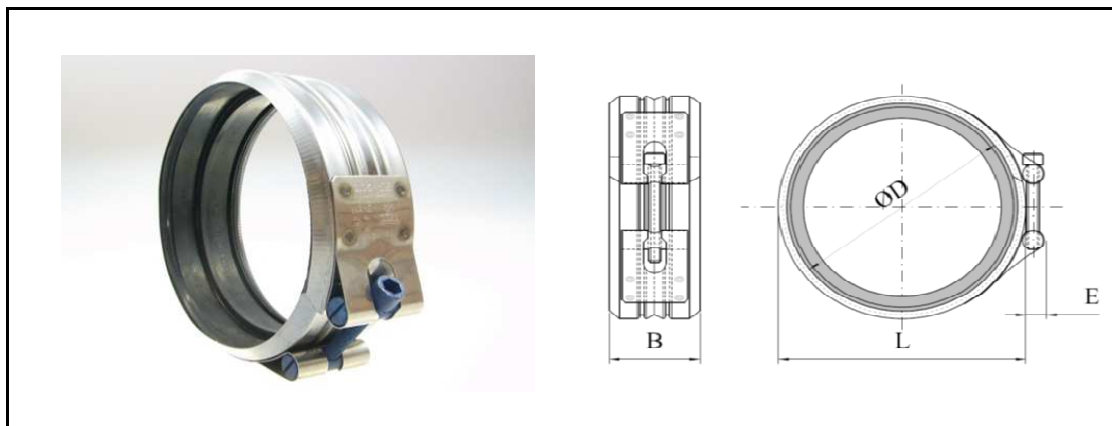

Article-Number	Dimensions [mm]					Weight [g]	Number of screws [pcs]	max. Pressure [bar]	PU [pcs]	Torque (Nm)
	Pipe	ØD	L	B	E					
20903	DN50	58	72	44	11	130	1	0.5	100	13-15
23335	DN75-S	75	89	44	11	157	1	0.5	100	13-15
20905	DN80	83	97	44	11	154	1	0.5	100	13-15
20906	DN100	110	124	44	11	193	1	0.5	50	13-15
20907	DN125	135	149	49	11	292	2	0.5	35	13-15
20908	DN150	175	175	49	11	324	2	0.5	25	13-15

Material:

- Clamping ring: Chrome steel 1.4520 according to DIN EN 10088-2
- Locking screw M6x45 mm, 6 mm hexagon socket, according to DIN 912 - 10.9
- Surface: Delta Tone / Delta Seal, 480 h NSS according to EN ISO 9227
- Sound absorbing rubber: EPDM - Shore = 55 ° ± 5 °

Relevant standards, regulations and certificates:



EN 877
EN 681-1
ISO 9001



tested
CE Declaration of Performance
meets the fire protection requirements

Further information may be found online under

<https://www.building-drainage.com/>