


PREIS® Rapid Grip

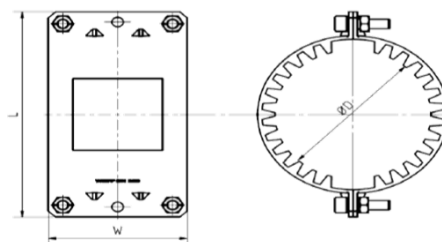

Article-Number	Dimensions [mm]					Weight [g]	Number of screws [pcs]	max. Pressure [bar]	PU [pcs]	Torque (Nm)
	Pipe	ØD	L	B						
21855	DN50	DN50	120	77		455	4	3	25	27-29
21856	DN80	DN70-80	140	77		558	4	3	25	27-29
21857	DN100	DN100	172	96		910	4	3	25	27-29
21858	DN125	DN125	196	96		1093	4	3	10	27-29
21859	DN150	DN150	221	96		1265	6	3	10	27-29

Material:

- DD11, galvanized
- Locking screw M8x30 mm, 6 mm hexagon socket, according to DIN 912
- Hex nut M8 to DIN 934

Remark: The cast iron claw DN150 (21859) is made in three parts.

Relevant standards, regulations and certificates:



EN 877
ISO 9001



tested
meets the fire protection requirements
restrained safety device

Further information may be found online under

<https://www.building-drainage.com/>