

RT-30/HACCP

ELECTRIC INSECTICIDES WITH GLUE TRAP



The above products are produced and comply with 93/43 of the European council on the 14th of June 1993.(HACCP)

Thank you for purchasing this product of Olympia Electronics. A European manufacturer.

GENERAL

Electric insecticides are used to exterminate various insects. They use special fluorescent tubes (Black light) to attract the insects from a distance. They can be used in any areas where there are many insects. These models use lamps with special plastic shell to protect the area from broken glass parts in case of a broken lamp. A special glue trap within the insecticide is used to trap the insects. These traps protect us from all kinds of insects (mosquitoes, gnats, flies, e.t.c) without using any chemicals. The insecticides are mounted high above the floor level and in a clearly visible place in order to attract the insects easier. One glue trap is included in the packaging of the electric insecticide.

RT-30/HACCP model uses a special glue trap for insects and incorporates two 8W special fluorescent tubes (Black light) placed in the front of the glue trap.

To mount the insecticide on the wall we can use the included mounting accessories. The device is powered by a voltage of 220-240V AC via a regular wall power outlet.

Spare Parts - Replacements.

A-1046. A package that contains 6 replacement glue traps.

A-1048. A package that contains 12 replacement glue traps.

A-1032. Accessory for the table version.


A-1030. Metallic protection grid. This grid does not prevent insects from entering the insecticide but is used to prevent small animals or birds from entering the insecticide.

Changing the lamps or the Starter

If the lamp or the Starter must be changed, this procedure can be done by the user, by following the procedure bellow:

1. Remove the power plug from the wall outlet.
2. Replace the Starter or the lamp which is not operating with one of the same type.
3. Insert the power plug into the wall outlet.

The lamp type used are : **SYLVANIA** type **T5 F8W/BL350S** for **RT-30/HACCP**.

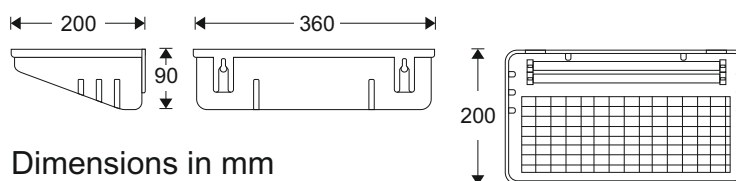

TECHNICAL CHARACTERISTICS

	RT-30/HACCP
Operation voltages	220-240V AC/50-60Hz
Maximum consumption	19W
Operation temperature range	0 to 60 °C
Humidity	Up-to 95% relative humidity
Construction material	ABS-PC
Dimensions	360 x 200 x 90 mm
Weight	1160 gr
Degrees of cover protection	IP 20
Produced in accordance with	EN 60335-1, EN 60335-2-59
Guarantee	2 years

WARNING!!!

- The luminaire is suitable for indoor use.
- The device must be kept away from children.
- The device must be not installed in areas with combustible gases or explosive dust.
- When the mains cable is damaged, this must be replaced by our SERVICE department or by an authorized technician.

Head office:
72nd km. O.N.R.THESALONIKI-KATERINI
TEL: 23530/51-200, 51611-12
AREA CODE: 60061 Kolindros Katerini - GREECE
Athens branch:
Adromaxis 286, Kalithea
TEL: 210/9852193,9852194